

01

[www.skorled.com](http://www.skorled.com)

 **Skorled**<sup>®</sup>

the best  
score is  
quality

BASKETBALL  
VOLLEYBALL  
HANDBALL  
**BASKETBALL**  
BASKETBALL  
VOLLEYBALL  
HANDBALL

01

Skorled

BASKETBALL  
SYSTEM

www.skorled.com

GRAPHIC  
SCOREBOARD

www.skorled.com

## SKL-LVE-BX / TECHNICAL PARAMETERS

Operating Voltage	100 – 120V / 200V – 240V
Operating Temperature	(-40°C) – (+55°C)
Protection Class	IP54
Type Of Material	Al
Guarantee Duration	2 Years
Frame Color	Mat Black



## GENERAL FEATURES

- It has three language supports: Turkish, English and French. There is support for a total of 157 characters. In addition to the characters of the three languages, it also includes German, Azerbaijani, Turkmen and Uzbek characters.
- It can work wired or wireless.
- The controller can be used wirelessly for up to 8 hours with a 1-hour charge.
- Systems are so easy for the user.
- Team information and player information of the team can be recorded.
- Statistics of the game are recorded.
- The operation of the scoreboard can be tested.
- It is compatible with FIBA whistle system.



SKL-BVH-V2



S 24-4Y



S24K



SKL-BGS-V1



# PROFESSIONAL HALL SCOREBOARD

www.skorled.com



## SBS - 7500 / TECHNICAL PARAMETERS

Height	3200 mm
Width	7040 mm
Thickness	82 mm
Weight	375 kg
Power Consumption	1200 W
Operating Voltage	220V - 260V
Operating Temperature	(-15°C) - (+55°C)
Protection Class	IP50
Type Of Material	Al
Guarantee Duration	2 Years
Frame Color	Mat Black
Mounting Kit Weight	77.3 kg

## FUNCTIONS

Stopwatch
Score
Period
Break
Bonus
Total Faul
Main Console
Shot Clock Console
Game Time Console
Horn
24 - 14 Second
Referee Back Panel
Faul Panel
Team Name
Player Name



SKL-BVH-V2



S24-4Y



S24K



SKL-BGS-V1



# PROFESSIONAL HALL SCOREBOARD

www.skorled.com



## SBS - 5500 / TECHNICAL PARAMETERS

Height	2530 mm
Width	5760 mm
Thickness	82 mm
Weight	162 kg
Power Consumption	1080 W
Operating Voltage	220V - 260V
Operating Temperature	(-15°C) - (+55°C)
Protection Class	IP50
Type Of Material	Al
Guarantee Duration	2 Years
Frame Color	Mat Black
Mounting Kit Weight	77.3 kg

## FUNCTIONS

Stopwatch
Score
Period
Break
Bonus
Total Faul
Main Console
Shot Clock Console
Game Time Console
Horn
24 - 14 Second
Referee Back Panel
Faul Panel
Team Name
Player Name



SKL-BVH-V2



S24-14



S24K



SKL-BGS-V1



# PROFESSIONAL HALL SCOREBOARD

www.skorled.com



## SBS 3500T / TECHNICAL PARAMETERS

Height	2530 mm
Width	3640 mm
Thickness	82 mm
Weight	117.8 kg
Power Consumption	120 W
Operating Voltage	220V - 260V
Operating Temperature	(-15°C) - (+55°C)
Readability Distance	120 m
Readability Angle	
• Horizontal	160°
• Vertical	120°
Characters for Team Name	12

Digit Height	
• Score	30 cm
• Player Values	12 cm
• Team Name	16 cm
Horn	120 dB
Protection	16 A sigorta / 16 A circuit breaker
Protection Class	IP50
Type Of Material	Al
Guarantee Duration	5 Years
Frame Color	Mat Black
Mounting Kit Weight	77.3 kg

# SEMI-PROFESSIONAL HALL SCOREBOARD

www.skorled.com



## SBS - 2500T / TECHNICAL PARAMETERS

Height	1750 mm
Width	3000 mm
Thickness	80 mm
Weight	48.6 kg
Power Consumption	96 W
Operating Voltage	220V - 260V
Operating Temperature	(-15°C) - (+55°C)
Protection Class	IP50
Type Of Material	Al
Guarantee Duration	2 Years
Frame Color	Mat Black
Mounting Kit Weight	24.3 kg

## FUNCTIONS

Stopwatch
Score
Period
Break
Bonus
Total Faul
Main Console
Shot Clock Console
Game Time Console
Horn
24 - 14 Second
Referee Back Panel
Faul Panel
Team Name



SKL-BVH-V2

S24 - 14



S24K



SKL-BGS-V1



SKL-BVH-V2



S24 - 14



S24K



SKL-BGS-V1



# SCHOOL TYPE HALL SCOREBOARD

www.skorled.com

## SBS 2000 / TECHNICAL PARAMETERS

Height	1000 mm
Width	2000 mm
Thickness	80 mm
Weight	24.3 kg
Power Consumption	60 W
Operating Voltage	220V - 260V
Operating Temperature	(-15°C) - (+55°C)
Protection Class	IP50
Type Of Material	Al
Guarantee Duration	2 Years
Frame Color	Mat Black
Mounting Kit Weight	7.2 kg

## FUNCTIONS

Stopwatch
Score
Period
Break
Bonus
Total Faul
Main Console
Shot Clock Console
Game Time Console
Horn
24 - 14 Second
Referee Back Panel

# SCHOOL TYPE HALL SCOREBOARD



www.skorled.com

## SBS - 1200 / TECHNICAL PARAMETERS

Height	600 mm
Width	1200 mm
Thickness	80 mm
Weight	10 kg
Power Consumption	60 W
Operating Voltage	220V - 260V
Operating Temperature	(-15°C) - (+55°C)
Protection Class	IP50
Type Of Material	Al
Guarantee Duration	2 Years
Frame Color	Mat Black
Mounting Kit Weight	5 kg

## FUNCTIONS

Stopwatch
Score
Period
Break
Bonus
Total Faul
Main Console
Shot Clock Console
Game Time Console
Horn
24 - 14 Second
Referee Back Panel

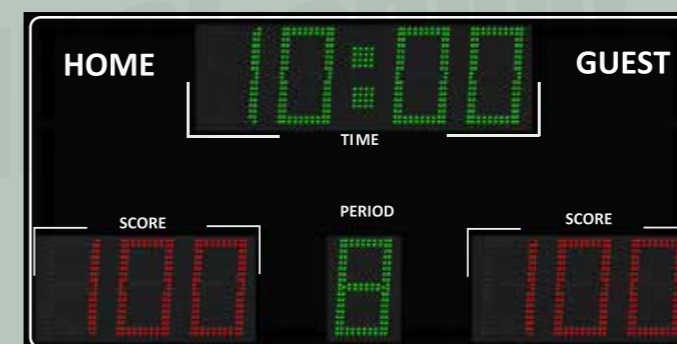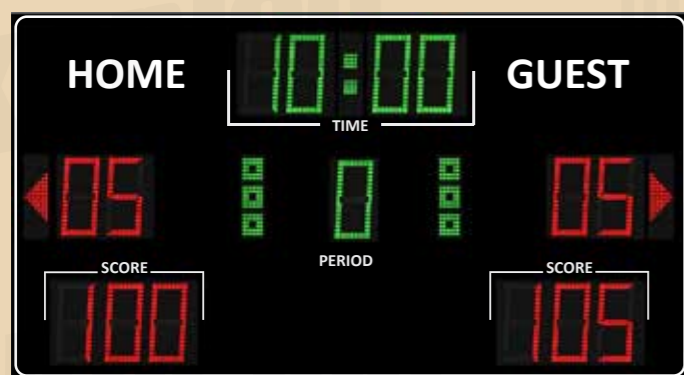

SKL-BVH-V2

S24 - 14



S24K



SKL-BGS-V1



SKL-BVH-V2

S24 - 14



S24K



SKL-BGS-V1



## SHOT CLOCK

### S 24-14 / TECHNICAL PARAMETERS

Height	550 mm
Width	500 mm
Thickness	85 mm
Weight	4.5 g
Average Power Consumption	24 W
Operating Voltage	12 V
Chronometer	13 kg
Backboard Led Light	Exist
Operating Temperature	(-15°C) – (+55°C)
Protection Class	IP50
Type Of Material	Al
Guarantee Duration	2 Years
Mounting Kit Weight	7.2 kg
Warning Indicator	Exist
EuroCup 5 Second Rule	Suitable
Frame Color	Mat Black



## SHOT CLOCK CONSOLE

### S 24 K / TECHNICAL PARAMETERS

Height	83 mm
Width	115 mm
Thickness	32 mm
Operating Voltage	3.3V
Operating Temperature	(-40°C) – (+55°C)
Protection Class	IP54
Type Of Material	ABS
Guarantee Duration	2 Years
Frame Color	Mat Black



## GAME TIME CONSOLE

### SKL-BGS-V1 / TECHNICAL PARAMETERS

Height	83 mm
Width	115 mm
Thickness	32 mm
Operating Voltage	3.3V
Operating Temperature	(-40°C) – (+55°C)
Protection Class	IP54
Type Of Material	ABS
Guarantee Duration	2 Years
Frame Color	Mat Black



## CUBE SHOT CLOCK

### S 24-4Y / TECHNICAL PARAMETERS

Height	550 mm
Width	500 mm
Thickness	500 mm
Weight	27.6 kg
Average Power Consumption	100 W
Operating Voltage	12 V
Chronometer	13 kg
Backboard Led Light	Exist
Operating Temperature	(-15°C) – (+55°C)
Protection Class	IP50
Type Of Material	Al
Guarantee Duration	2 Years
Mounting Kit Weight	7.2 kg
Warning Indicator	Exist
EuroCup 5 Second Rule	Suitable
Frame Color	Mat Black



## MAIN CONSOLE

### SKL-BVH-V2 / TECHNICAL PARAMETERS

Height	173 mm
Width	342 mm
Thickness	45 mm
Average Power Consumption	4 W
Operating Voltage	10.8V – 16.8V
Operating Temperature	(-40°C) – (+55°C)
Protection Class	IP54
Type Of Material	Al
Guarantee Duration	2 Years

