

OB

www.skorled.com

SWIMMING
SWIMMING
SWIMMING
SWIMMING
SWIMMING
SWIMMING

 Skorled®

the best
score is
quality




GENERAL FEATURES

- It has three language supports: Turkish, English and French. There is support for a total of 157 characters. In addition to the characters of the three languages, it also includes German, Azerbaijani, Turkmen and Uzbek characters.
- It can work wired or wireless.
- The controller can be used wirelessly for up to 4 hours with a 1 hour charge.
- Systems are so easy for the user.
- It works fully compatible with Splash Meet Manager program.
- Race data and results can be printed out with an external thermal printer.
- All equipment can be tested.
- It has the feature of rescuing races that cannot be started on time.
- There are 50 race, 128 event order and 100 flash event order memories.
- Lane errors can be followed instantly both on the lane box and on the controller.
- Time is measured with an accuracy of 0.00 and a precision of 0.00.

EQUIPMENTS

- 1 piece race starter (STR - 100)
- As many as number of lanes touchpad (ST - 2490 - F)
(It might be increased or decreased according to number of far or near lanes.)
- As many as number of lanes lane box (SKL - LB - V1)
(It might be increased or decreased according to number of far or near lanes.)
- 1 piece thermal printer (SKL - ETP - 5V)
- 1 piece swimming controller (SKL - SWC - V2)
- 1 piece graphic scoreboard (SKL - LIVE - X)
(The screen size can be changed optionally.)

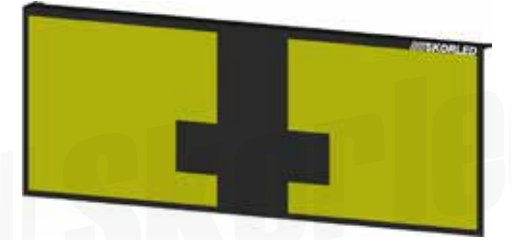

Touchpad (ST-2490-F)



Race Starter (STR-100)



Lane Box (SKL-LB-V1)



Thermal Printer (SKL-ETP-5V)



SKL-SWC-V2 (Swimming Controller & Timer)



Graphics Scoreboard (SKL- LVE- X)



SSS - N20 - A


www.skorled.com

EQUIPMENTS

- 1 piece race starter (STR – 100)
- As many as number of lanes touchpad (ST – 2490 – F) (It might be increased or decreased according to number of far or near lanes.)
- As many as number of lanes lane box (SKL – LB – V1) (It might be increased or decreased according to number of far or near lanes.)
- 1 piece thermal printer (SKL – ETP – 5V)
- 1 piece swimming controller (SKL – SWC – V2)
- 1 piece lane scoreboard (SKL – SPL – X) (The number of lines can be increased or decreased depending to the number of lanes)

OPTIONAL EQUIPMENTS

- Record, lap-length and team score, and the scoreboard modules can be added to the scoreboard.
- Scoreboard can be produced with a display size of 25 cm, 30 cm or with a special dimensions according to the display.

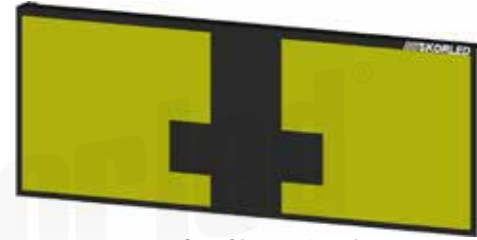

Touchpad (ST-2490-F)



Race Starter (STR-100)



Lane Box (SKL-LB-V1)



Thermal Printer (SKL-ETP-5V)



SKL-SWC-V2 (Swimming Controller & Timer)

PLACE	LANE	TIME
1	3	:40.57
2	8	:40.93
3	7	:41.39
4	0	:41.82

Lane Scoreboard (SKL-SPL-X)

SSS - N20 - B


www.skorled.com

EQUIPMENTS

- 1 piece race starter (STR – 100)
- As many as number of lanes touchpad (ST – 2490 – F) (It might be increased or decreased according to number of far or near lanes.)
- As many as number of lanes lane box (SKL – LB – V1) (It might be increased or decreased according to number of far or near lanes.)
- 1 piece thermal printer (SKL – ETP – 5V)
- 1 piece swimming controller (SKL – SWC – V2)
- 1 piece time module (SKL – STM – 1L)
- 1 piece event-heat module (SKL – SEH – 1L)
- 1 piece lane scoreboard (SKL – SPL – X) (The number of lines can be increased or decreased depending to the number of lanes.)

OPTIONAL EQUIPMENTS

- Record, lap-length and team score, and the scoreboard modules can be added to the scoreboard.
- Scoreboard can be produced with a display size of 25 cm, 30 cm or with a special dimensions according to the display.

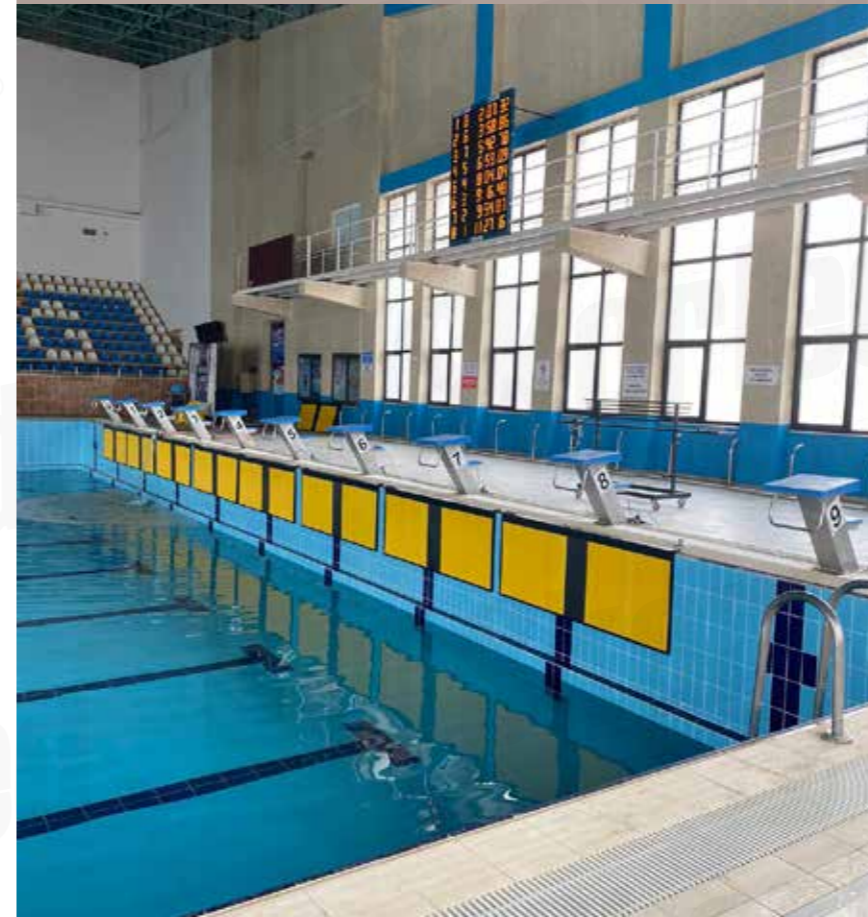

Touchpad (ST-2490-F)



Race Starter (STR-100)



Lane Box (SKL-LB-V1)



Thermal Printer (SKL-ETP-5V)



SKL-SWC-V2 (Swimming Controller & Timer)

PLACE	LANE	TIME
1	3	:40.57
2	8	:40.93
3	7	:41.39
4	0	:41.82

TIME 32:47.63
284 EVENT HEAT 90

Time Module (SKL-STM-1L)
Event-Heat Module (SKL-SEH-1L)
Lane Scoreboard (SKL-SPL-X)

SSS - N20 - C


www.skorled.com

EQUIPMENTS

- 1 piece race starter (STR – 100)
- As many as number of lanes touchpad (ST – 2490 – F) (It might be increased or decreased according to number of far or near lanes.)
- As many as number of lanes lane box (SKL – LB – V1) (It might be increased or decreased according to number of far or near lanes.)
- 1 piece thermal printer (SKL – ETP – 5V)
- 1 piece swimming controller (SKL – SWC – V2)
- 1 piece lap-length-time module (SKL – SLT – 2L)
- 1 piece event-heat-record module (SKL – SEHR – 2L)
- 1 piece lane scoreboard (SKL – SPL – X)
(The number of lines can be increased or decreased depending to the number of lanes.)

OPTIONAL EQUIPMENTS

- Record, lap-length and team score, and the scoreboard modules can be added to the scoreboard.
- Scoreboard can be produced with a display size of 25 cm, 30 cm or with a special dimensions according to the display.

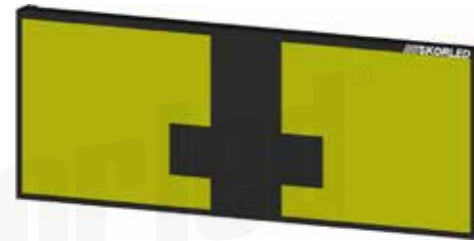

Touchpad (ST-2490-F)



Race Starter (STR-100)



Lane Box (SKL-LB-V1)



Thermal Printer (SKL-ETP-5V)



SKL-SWC-V2 (Swimming Controller & Timer)



Lap-Length-Time Module (SKL-SLT-2L)
Event-Heat-Record Module (SKL-SEHR-2L)
Lane Scoreboard (SKL-SPL-X)

SSS - N20 - D

www.skorled.com

EQUIPMENTS

- 1 piece race starter (STR – 100)
- As many as number of lanes touchpad (ST – 2490 – F) (It might be increased or decreased according to number of far or near lanes.)
- As many as number of lanes lane box (SKL – LB – V1) (It might be increased or decreased according to number of far or near lanes.)
- 1 piece thermal printer (SKL – ETP – 5V)
- 1 piece swimming controller (SKL – SWC – V2)
- 1 piece lap-length-time module (SKL – SLT – 2L)
- 1 piece event-heat-record module (SKL – SEHR – 2L)
- 1 piece lane scoreboard (SKL – SPL – X)
(The number of lines can be increased or decreased depending to the number of lanes.)
- 1 piece team score module (SKL-STP-2L)
- 2 pieces lap module (SKL – SLAP – S)

OPTIONAL EQUIPMENTS

- Scoreboard can be produced with a display size of 25 cm, 30 cm or with a special dimensions according to the display.




Lane Scoreboard (SKL-SPL-X)



Lap Module (SKL-SLAP-S)



Team Score Module (SKL-STP-2L)

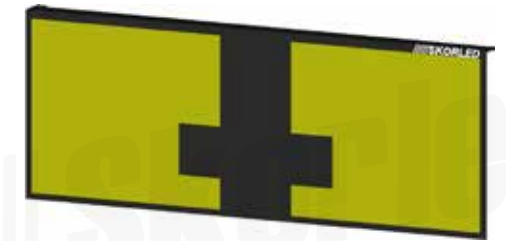

Touchpad (ST-2490-F)



Race Starter (STR-100)



Lane Box (SKL-LB-V1)



Thermal Printer (SKL-ETP-5V)



SKL-SWC-V2 (Swimming Controller & Timer)



Event-Heat-Record Module (SKL-SEHR-2L)
Lap-Length-Time Module (SKL-SLT-2L)

LANE BOX

SKL - LB - V1 / TECHNICAL PARAMETERS

Height	80 mm
Width	160 mm
Thickness	41 mm
Weight	520 g
Cable Length	3 m
Average Power Consumption	380 mW
Operating Voltage	12 V
Operating Temperature	(-40°C) - (+55°C)
Protection Class	IP65
Type Of Material	ABS
Guarantee Duration	2 Years
Frame Color	Mat Black



SWIMMING CONTROLLER (TIMER)

SKL - SWC - V2 / TECHNICAL PARAMETERS

Height	102 mm
Width	338 mm
Thickness	287 mm
Weight	2.6 kg
Average Power Consumption*	3 W
Operating Voltage	10.8V - 16.8V
Operating Temperature	(-40°C) - (+55°C)
Protection Class	IP54
Type Of Material	Al
Guarantee Duration	2 Years



RACE STARTER

STR - 100 / TECHNICAL PARAMETERS

Height	180 mm
Width	300 mm
Thickness	186 mm
Weight	3.5 kg
Power Consumption	125/250 W
Operating Voltage	12V
Operating Temperature	(-15°C) - (+55°C)
Protection Class	IP65
Type Of Material	Al
Guarantee Duration	2 Years
Frame Color	Mat Black



THERMAL PRINTER

SKL - ETP - 5V / TECHNICAL PARAMETERS


Height	57 mm
Width	133 mm
Thickness	126 mm
Maksimum Power Consumption	7.5 W
Operating Voltage	5V - 9V
Operating Temperature	(+5°C) - (+50°C)
Operating Humidity	%10 - %90
Printing Speed	50 - 80 mm/s
Maximum Paper Roll Diameter	39 mm
Protection Class	IP50
Guarantee Duration	2 Years
Frame Color	Mat Black



RELAY TAKE-OFF PLATFORM

SKL - RTS - V1 / TECHNICAL PARAMETERS


Maximum Height	660 mm
Maximum Width	640 mm
Pressing Area	0,37 m²
Pressing Area Width	505 mm
Weight	25 kg
Operating Temperature	(-40°C) - (+55°C)
Protection Class	IP54
Type Of Material	CTP
Guarantee Duration	2 Years
Frame Color	White-Blue

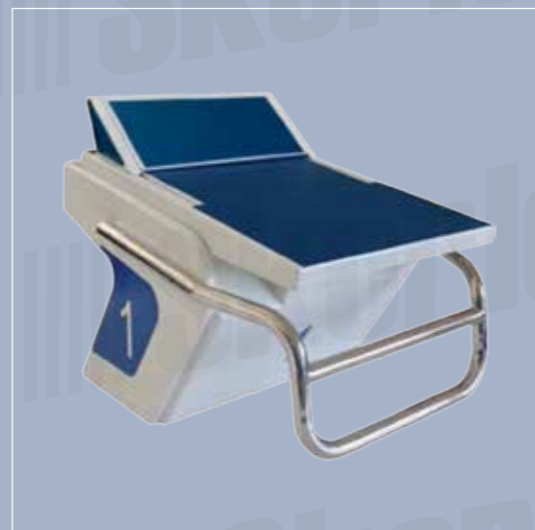

TOUCHPAD

ST - 2490 - F / TECHNICAL PARAMETERS


Dimensions	240x90x1 cm
Weight	17 kg
Operating Type	Switch method
Product Color	Yellow-Black
Connection Socket	Banana jack
Product Maintenance	Maintenance is required
Control Unit	With controller connection
Guarantee Duration	2 Years
Frame Type	UV Resistant PVC
Protection Class	IP67
Platform	Device can be mounted where you want
Cable Length	2.75 meters

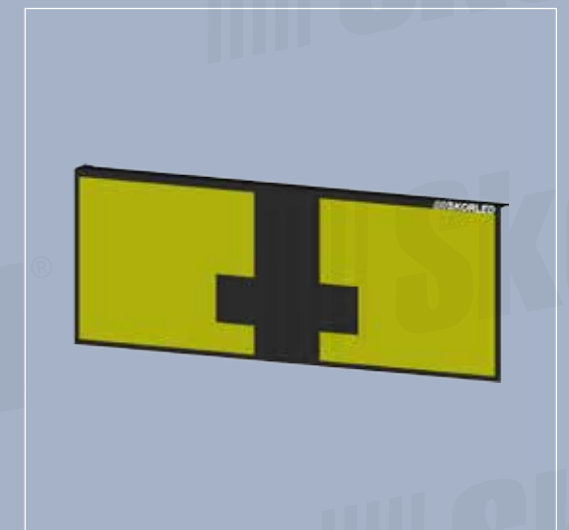

GRAPHIC SCOREBOARD

SKL - LVE - X / TECHNICAL PARAMETERS

Operating Voltage	100 - 120V / 200V - 240V
Operating Temperature	(-40°C) - (+55°C)
Protection Class	IP54
Type Of Material	Al
Guarantee Duration	2 Years
Frame Color	Mat Black

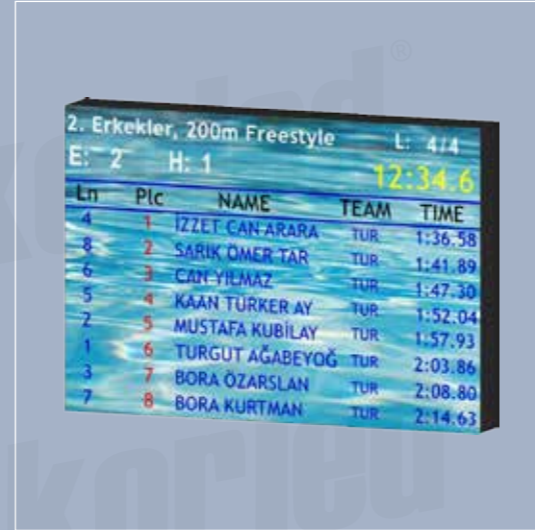

LANE SCOREBOARD

SKL - SPL - X / TECHNICAL PARAMETERS

Height	2900 mm
Width	1900 mm
Thickness	85 mm
Weight	75 kg
Maximum Power Consumption	900 W
Average Power Consumption	475 W
Operating Voltage	100 - 120V / 200V - 240V
Operating Temperature	(-40°C) - (+55°C)
Protection Class	IP54
Type Of Material	Al
Guarantee Duration	2 Years
Frame Color	Mat Black



LANE SCOREBOARD

SKL - SLN - 1L / TECHNICAL PARAMETERS

Height	290 mm
Width	1900 mm
Thickness	85 mm
Weight	9.2 kg
Maximum Power Consumption	90 W
Average Power Consumption	47.5 W



EVENT-HEAT-RECORD SCOREBOARD MODULES

SKL - SREC - 1L / SKL - SEH - 1L
TECHNICAL PARAMETERS

Height	290 mm
Width	1900 mm
Thickness	85 mm
Weight	9 kg
Maximum Power Consumption	67.5 W
Average Power Consumption	35.6 W



LANE SCOREBOARD

SKL - SLN - 2L / TECHNICAL PARAMETERS

Height	580 mm
Width	1900 mm
Thickness	85 mm
Weight	14.4 kg
Maximum Power Consumption	180 W
Average Power Consumption	95 W



EVENT-HEAT-RECORD SCOREBOARD MODULES

SKL - SEHR - 2L / TECHNICAL PARAMETERS


Height	290 mm
Width	1900 mm
Thickness	85 mm
Weight	9 kg
Maximum Power Consumption	67.5 W
Average Power Consumption	35.6 W
Operating Voltage	100 - 120V / 200V - 240V
Operating Temperature	(-40°C) - (+55°C)
Protection Class	IP54
Type Of Material	Al
Guarantee Duration	2 Years
Frame Color	Mat Black



LAP-LENGTH-TIME SCOREBOARD MODULES

SKL - SLL - 1L / TECHNICAL PARAMETERS

Height	290 mm
Width	1900 mm
Thickness	85 mm
Weight	8.8 kg
Maximum Power Consumption	45 W
Average Power Consumption	23.8 W

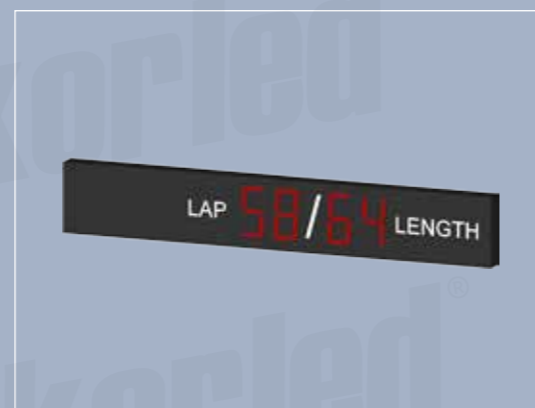

LAP-LENGTH-TIME SCOREBOARD MODULES

SKL - SLT - 2L / TECHNICAL PARAMETERS

Height	580 mm
Width	1900 mm
Thickness	85 mm
Weight	14 kg
Maximum Power Consumption	112.5 W
Average Power Consumption	59.4 W
Operating Voltage	100 - 120V / 200V - 240V
Operating Temperature	(-40°C) - (+55°C)
Protection Class	IP54
Type Of Material	Al
Guarantee Duration	2 Years
Frame Color	Mat Black



LAP-LENGTH-TIME SCOREBOARD MODULES

SKL - STM - 1L / TECHNICAL PARAMETERS

Height	290 mm
Width	1900 mm
Thickness	85 mm
Weight	9 kg
Maximum Power Consumption	67.5 W
Average Power Consumption	35.6 W



TEAM SCORE SCOREBOARD MODULES

SKL - STP - HG / SKL - STP - GG TECHNICAL PARAMETERS

Height	290 mm
Width	1900 mm
Thickness	85 mm
Weight	9.2 kg
Maximum Power Consumption	90 W
Average Power Consumption	47.5 W



LAP-LENGTH-TIME SCOREBOARD MODULES

SKL - SLAP - S / TECHNICAL PARAMETERS

Height	500 mm
Width	550 mm
Thickness	85 mm
Weight	4.5 kg
Maximum Power Consumption	22.5 W
Average Power Consumption	11.9 W



TEAM SCORE SCOREBOARD MODULES

SKL - STP - 2L / TECHNICAL PARAMETERS

Height	580 mm
Width	1900 mm
Thickness	85 mm
Weight	14.4 kg
Maximum Power Consumption	180 W
Average Power Consumption	95 W
Operating Voltage	100 - 120V / 200V - 240V
Operating Temperature	(-40°C) - (+55°C)
Protection Class	IP54
Type Of Material	Al
Guarantee Duration	2 Years
Frame Color	Mat Black

